



Test Report: OWA-200E-42

200W Single Output Moistureproof Adaptor

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Control Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test

■ RELIABILITY TEST


ENVIRONMENT TEST

DESIGN VERIFY TEST


OUTPUT FUNCTION TEST

N O	TEST ITEM	SPECIFICATIO N	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE TOLERANCE	V1: -3% ~ 3% (Max)	I/P:180VAC /264AC O/P:FULL~MIN LOAD Ta:25°C	V1: -0.05 %~ 0.45%
2	LINE REGULATION	V1: -0.5% ~0.5% (Max)	I/P:180VAC~264AC O/P:FULL LOAD Ta:25°C	V1: 0 %~ 0%
3	LOAD REGULATION	V1: -3% ~ 3% (Max)	I/P: 230 VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.19%~0.21%
4	OVER/UNDERSHOOT TEST	< +5%	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	TEST: 4.85%
5	RIPPLE & NOISE	V1: 250mVp-p (Max)	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	V1: 90 mVp-p / 100% load

high frequency :

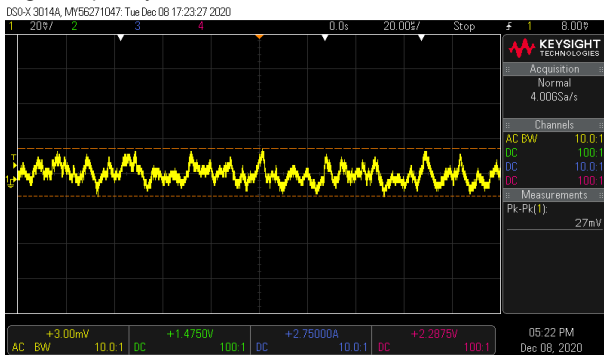


low frequency :

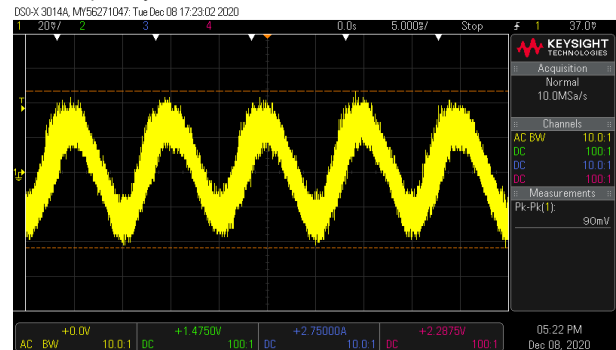


6	SET UP TIME (Max)	230VAC/500ms	I/P: 230 VAC O/P:FULL LOAD Ta:25°C 使用 LEDH MODE TEST	230VAC/ 223.6ms
---	-------------------	--------------	---	-----------------

INPUT=230VAC/50HZ @ FULL LOAD


CH1 : Output Voltage CH3: AC Input Voltage

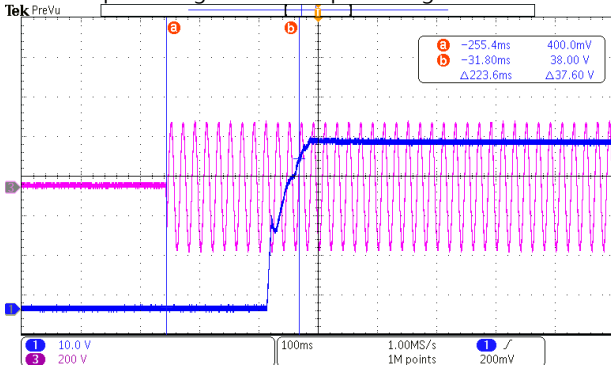

7	RISE TIME (Max)	230VAC/80ms	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C 使用 LEDH MODE TEST	230VAC/ 54.4ms
---	-----------------	-------------	---	----------------

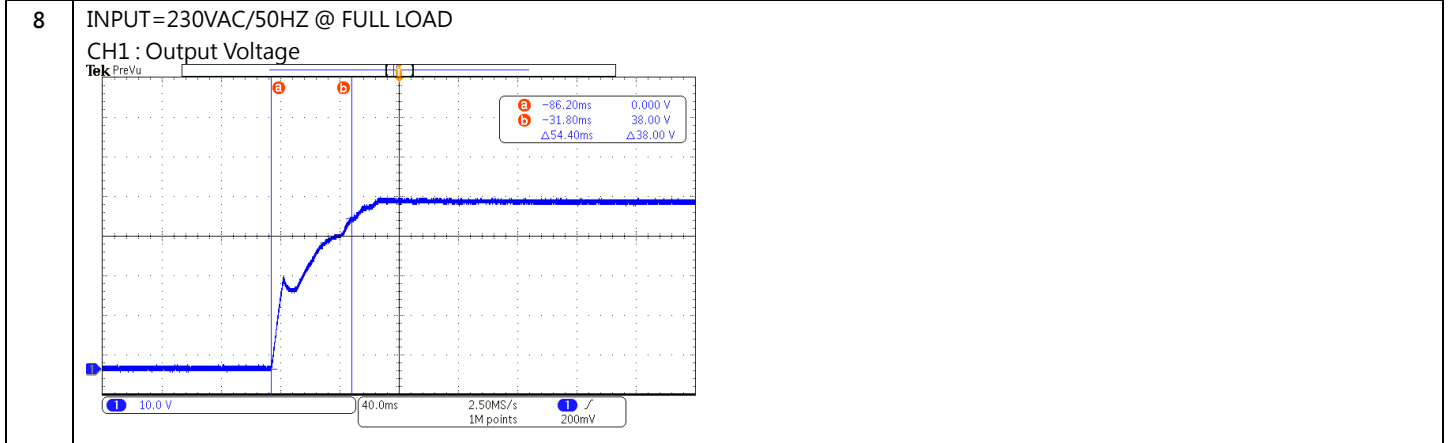


9	HOLD UP TIME (Typ)	230VAC/10ms	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C 使用 LEDH MODE TEST	230VAC/ 13.4 ms
---	--------------------	-------------	---	-----------------

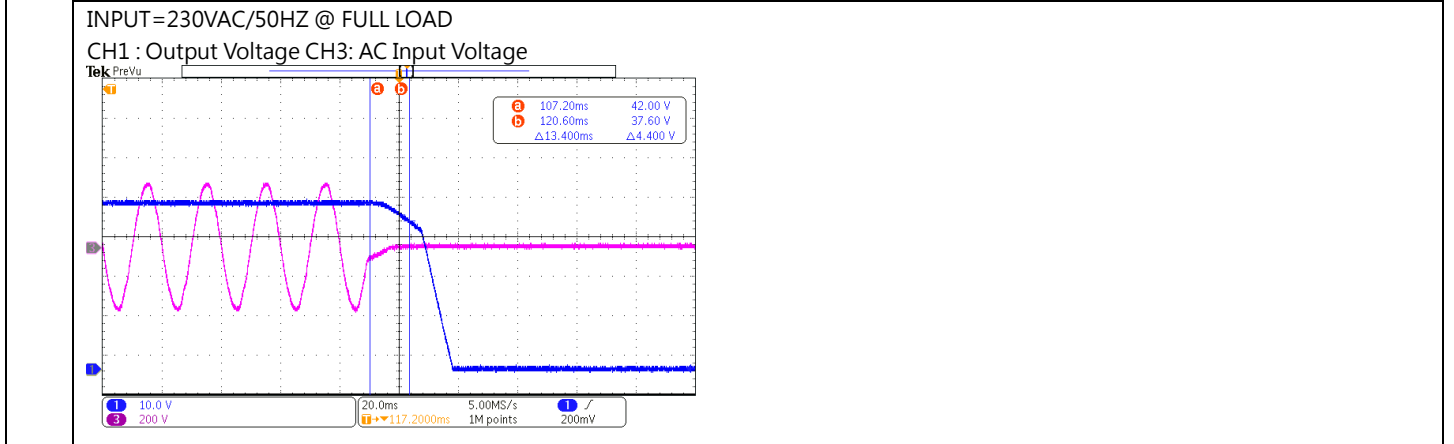


10	DYNAMIC LOAD	V1: 4200mVp-p	I/P: 230VAC O/P: (1) FULL /50% LOAD 50%DUTY / 120HZ (2) FULL /50% LOAD 50%DUTY / 1KHZ Ta: 25°C	960mVp-p FULL /50% LOAD 50%DUTY / 120HZ 930mVp-p FULL /50% LOAD 50%DUTY / 1KHZ
----	--------------	---------------	--	---

FULL /50% LOAD 50%DUTY / 120HZ

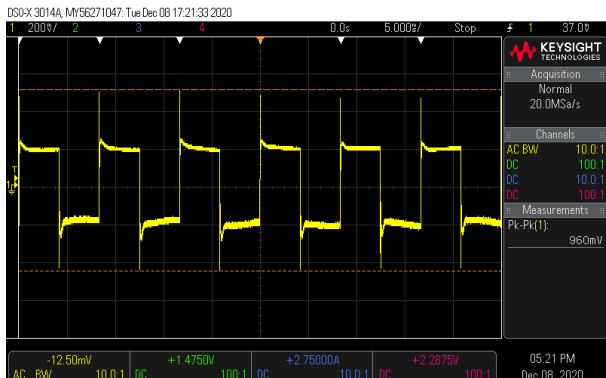


FULL /50% LOAD 50%DUTY / 1KHZ

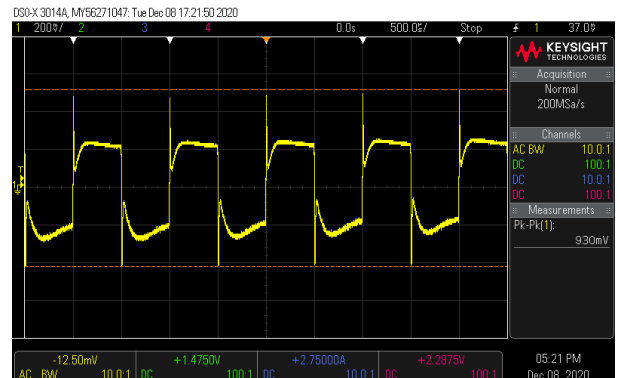

INPUT FUNCTION TEST

N O	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~264VAC 254VDC~ 370VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD Ta:25°C	(1) 180V~267VAC (2) 242Vdc~370Vdc/FULL LOAD (3) 242Vdc~370Vdc/FULL LOAD
			I/P: LOW-LINE-3V=177 VAC HIGH-LINE+15%=300 VAC O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 180 VAC ~264VAC O/P:FULL~MIN LOAD Ta:25°C	OK
3	INPUT CURRENT (TYP)	230 VAC/1.1A	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	I =0.92A/ 230VAC
	NO LOAD POWER CONSUMPTION	<0.15W	I/P: 230 VAC O/P:NO LOAD Ta:25°C	0.1332W
4	POWER FACTOR(TYP)	0.96/230 VAC FULL LOAD	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	PF= 0.982/230V/100%LOAD

P.F vs LOAD

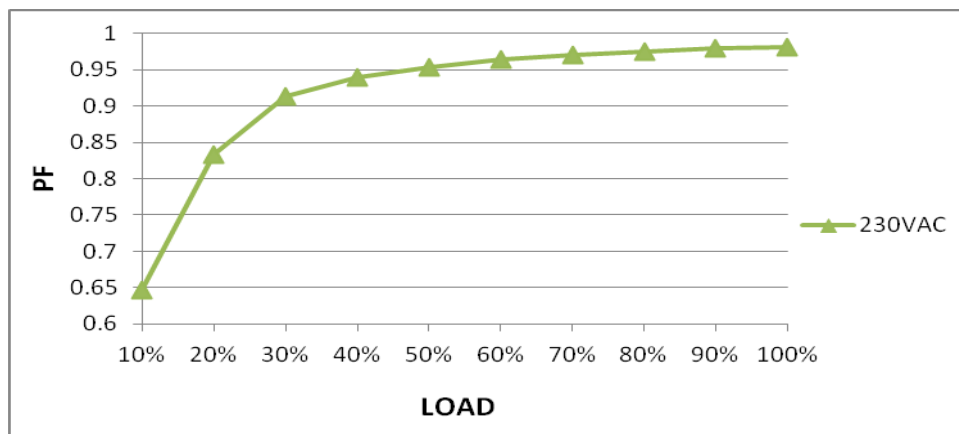

5	EFFICIENCY (TYP)	94/%	I/P: 230VAC O/P: 100%Load Ta:25°C	94.73%																						
<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>EFFICIENCY (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>88</td></tr> <tr><td>20%</td><td>92</td></tr> <tr><td>30%</td><td>92</td></tr> <tr><td>40%</td><td>93</td></tr> <tr><td>50%</td><td>94</td></tr> <tr><td>60%</td><td>94.5</td></tr> <tr><td>70%</td><td>94.5</td></tr> <tr><td>80%</td><td>94.5</td></tr> <tr><td>90%</td><td>94.5</td></tr> <tr><td>100%</td><td>94.7</td></tr> </tbody> </table>					LOAD (%)	EFFICIENCY (%)	10%	88	20%	92	30%	92	40%	93	50%	94	60%	94.5	70%	94.5	80%	94.5	90%	94.5	100%	94.7
LOAD (%)	EFFICIENCY (%)																									
10%	88																									
20%	92																									
30%	92																									
40%	93																									
50%	94																									
60%	94.5																									
70%	94.5																									
80%	94.5																									
90%	94.5																									
100%	94.7																									
6	INRUSH CURRENT (TYP)	230 V/ 65A (twidth=550us measured at 50% Ipeak) COLD START	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	I = 52.2 A/ 230VAC T50=448us																						
<p>INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH3 : Input current</p>																										

ROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT PROTECTION	105 %~150%	I/P: 267VAC I/P: 230VAC I/P: 180VAC O/P:TESTING Ta:25°C	126.2%/ 267VAC 126.3%/ 230VAC 127%/180VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	V1: 46 V~ 57V	I/P: 267VAC I/P: 230VAC I/P: 180VAC O/P:TESTING Ta:25°C	53.27V/ 267VAC 52.25V/ 230VAC 53.19V/ 180VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover

3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 267 VAC I/P: 180 VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 267VAC I/P: 180 VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q 73 Rated 11A/600V	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =267V</p> <p>VDS:</p> <p>O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load.</p> <p>I/P:Low-Line -3V = 177V</p> <p>O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load.</p> <p>Ta:25°C</p>	<p>VDS:</p> <p>(1) 451V (2) 467V (3) 451V (4) 451V (5) 447V (6) 455V (7) 459V</p> <p>VDS:</p> <p>(1) 451V (2) 467V (3) 463V (4) 447V (5) 455V (6) 455V (7) 455V</p>

2	<p>P.F.C Transistor (D to S) or (C to E) Peak Voltage</p>	<p>Q 1 Rated 26A/600V</p>	<p>I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load.</p> <p>I/P:Low-Line -3V =177V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load.</p> <p>Ta:25°C</p>	<p>VDS: (1) 495V (2) 479V (3) 495V (4) 495V (5) 495V (6) 491V (7) 483V</p> <p>VDS: (1) 491V (2) 447V (3) 491V (4) 495V (5) 495V (6) 491V (7) 462V</p>
3	<p>P.F.C DIODE</p>	<p>D 5 Rated 9 A/ 600V</p>	<p>I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz</p> <p>I/P:Low-Line -3V = 177V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz</p> <p>Ta:25°C</p>	<p>(1) 495V (2) 451V (3) 435V (4) 439V</p> <p>(1) 427V (2) 415V (3) 419V (4) 427V</p>

4	Diode Peak Voltage	<p>Q101 Rated 33 A/150V</p> <p>Q100 Rated 33A/ 150V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =267 V</p> <p>O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD</p> <p>Ta:25°C</p>	<p>Q101: VDS: (1) 93V (2) 11V (3) 93.8V (4) 94.6V (5) 93.8V (6) 93V (7) 10.2V (8) 93.8V</p> <p>Q100: VDS: (1) 96.2V (2) 11.8V (3) 95.4V (4) 94.6V (5) 94.6V (6) 96.2V (7) 11.8V (8) 92.2V</p>
5	Input Capacitor Voltage	C5 Rated: 100μ / 450V	<p>I/P:High-Line +3V =267V</p> <p>O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change (4)Full load continue</p> <p>Ta:25°C</p>	<p>(1) 431V (2) 411V (3) 431V (4) 419 V</p>
6	Control IC Voltage Test	<p>U2 Rated -0.3V~20V</p> <p>U1 Rated 0.3V~ 35V</p>	<p>AC ON/OFF</p> <p>I/P:High-Line +3V =267 V</p> <p>O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VRmin(Low LINE)</p> <p>Ta:25°C</p>	<p>U2: (1) 16.6V (2) 16.8V (3) 17.8V (4) 15.8V (5) 15.6V</p> <p>U1: (1) 16.6V (2) 16.6V (3) 16.6V (4) 16.2V (5) 16.6V</p>

SAFETY & EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.2KVAC/min	I/P-O/P: 4.5KVAC/min Ta:25°C	I/P-O/P: 1.315mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P: 500 VDC Ta:25°C	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P: 230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55032 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55032 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR : 8KV / Contact : 4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																												
1	TEMPERATURE RISE TEST	MODEL : OWA-200U-36 1. ROOM AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=23.5 °C 2. HIGH AMBIENT BURN-IN : 2HRS I/P : 230VAC O/P : FULL LOAD Ta=48.3 °C																																																																														
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=23.5 °C</th> <th>HIGH AMBIENT Ta=48.3°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>U3</td><td>55.1°C</td><td>76.0°C</td></tr> <tr><td>2</td><td>BD1</td><td>60.3°C</td><td>82.0°C</td></tr> <tr><td>3</td><td>C1</td><td>58.7°C</td><td>77.6°C</td></tr> <tr><td>4</td><td>Q1</td><td>60.4°C</td><td>82.6°C</td></tr> <tr><td>5</td><td>U1</td><td>59.2°C</td><td>81.1°C</td></tr> <tr><td>6</td><td>U2</td><td>62.0°C</td><td>84.2°C</td></tr> <tr><td>7</td><td>C35</td><td>57.8°C</td><td>80.1°C</td></tr> <tr><td>8</td><td>Q50</td><td>60.5°C</td><td>82.7°C</td></tr> <tr><td>9</td><td>T1</td><td>69.4°C</td><td>92.4°C</td></tr> <tr><td>10</td><td>C5</td><td>58.3°C</td><td>80.3°C</td></tr> <tr><td>11</td><td>U101</td><td>60.5°C</td><td>83.6°C</td></tr> <tr><td>12</td><td>Q100</td><td>52.7°C</td><td>77.0°C</td></tr> <tr><td>13</td><td>Q101</td><td>57.2°C</td><td>81.5°C</td></tr> <tr><td>14</td><td>C115</td><td>49.4°C</td><td>72.3°C</td></tr> <tr><td>15</td><td>C105</td><td>48.8°C</td><td>72.8°C</td></tr> <tr><td>16</td><td>C106</td><td>50.0°C</td><td>73.7°C</td></tr> <tr><td>17</td><td>RTH5</td><td>59.3°C</td><td>81.4°C</td></tr> <tr><td>18</td><td>TC</td><td>52.3°C</td><td>74.9°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=23.5 °C	HIGH AMBIENT Ta=48.3°C	1	U3	55.1°C	76.0°C	2	BD1	60.3°C	82.0°C	3	C1	58.7°C	77.6°C	4	Q1	60.4°C	82.6°C	5	U1	59.2°C	81.1°C	6	U2	62.0°C	84.2°C	7	C35	57.8°C	80.1°C	8	Q50	60.5°C	82.7°C	9	T1	69.4°C	92.4°C	10	C5	58.3°C	80.3°C	11	U101	60.5°C	83.6°C	12	Q100	52.7°C	77.0°C	13	Q101	57.2°C	81.5°C	14	C115	49.4°C	72.3°C	15	C105	48.8°C	72.8°C	16	C106	50.0°C	73.7°C	17	RTH5	59.3°C	81.4°C	18	TC	52.3°C	74.9°C
NO	Position	ROOM AMBIENT Ta=23.5 °C	HIGH AMBIENT Ta=48.3°C																																																																													
1	U3	55.1°C	76.0°C																																																																													
2	BD1	60.3°C	82.0°C																																																																													
3	C1	58.7°C	77.6°C																																																																													
4	Q1	60.4°C	82.6°C																																																																													
5	U1	59.2°C	81.1°C																																																																													
6	U2	62.0°C	84.2°C																																																																													
7	C35	57.8°C	80.1°C																																																																													
8	Q50	60.5°C	82.7°C																																																																													
9	T1	69.4°C	92.4°C																																																																													
10	C5	58.3°C	80.3°C																																																																													
11	U101	60.5°C	83.6°C																																																																													
12	Q100	52.7°C	77.0°C																																																																													
13	Q101	57.2°C	81.5°C																																																																													
14	C115	49.4°C	72.3°C																																																																													
15	C105	48.8°C	72.8°C																																																																													
16	C106	50.0°C	73.7°C																																																																													
17	RTH5	59.3°C	81.4°C																																																																													
18	TC	52.3°C	74.9°C																																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 230 VAC O/P : 127 % LOAD Ta : 25°C	TEST : OK																																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 230VAC/180VAC O/P : 100 % LOAD Ta=-45 °C	TEST : OK																																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45 °C NO DAMAGE	I/P : 264VAC O/P : FULL LOAD Ta= 45 °C HUMIDITY= 95 %R.H	TEST : OK																																																																												
5	TEMPERATURE COEFFICIENT	± 0.03 %/(0°C~50°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.012 %/°C(0~50°C)																																																																												

6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10CYCLE 5. Input/Output condition : STATIC
7	THERMAL SHOCK TEST	-40~45°C	1. Thermal shock Temperature : -45°C~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test
8	VIBRATION TEST	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 6G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C
9	CAPACITOR LIFE CYCLE	SUPPOSE C106 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta=25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta=45 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=45 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta=45 °C LIFE TIME	(1) 581123HRS (2) 157085HRS (3) 276430HRS (4) 374468 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 2677.8K hrs min. Telcordia SR-332 (Bellcore); 267.6K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	WUWQ/HUANGMK	WENF	LINKX

2018.4.30

GP-A50-F010