





















## Features

- Wide input range 100~305VAC( Class I )
- Full power output at 70~100% Constant power mode operation
- Metal case with IP67, suitable for outdoor application
- LVLE(H type), Class 2(24V)power unit
- Surge protection with 6KV/4KV (10KV/6KV optional)
- 3 in 1 dimming function (Dim to off and Isolation design)
- India (EESL) version with Input Over Voltage Protection can survive input voltage stress of 440Vac for 48 hours
- Protection functions: OVP/SCP/OCP/OTP
- Comply with UL Class P
- Life time >50,000 hrs. and 5 years warranty

# Description

# Applications


- · Skyscraper lighting
- · Street lighting
- · Floodlight Lighting
- Stage lighting
- Fishing lighting
- · Horticulture lighting
- · Bay lighting
- DMX power supply
- Type HL for use in class I, Division 2

## GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

XLG-100 series is a 100W LED AC/DC driver featuring the constant power mode.XLG-100 operates from 100~305VAC and offers models with different rated current ranging between 700mA and 8000mA. Thanks to the high efficiency up to 92%, with the fanless design, the entire series is able to operate for - $40^{\circ}$ C ~+90 $^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XLG-100 series comply with the latest version of IEC61347/GB19510.1 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

## Model Encoding

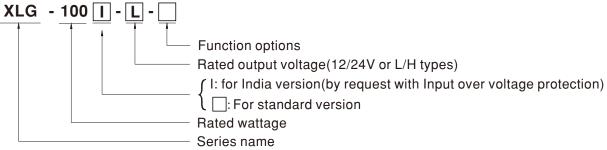

Type	Function	Note
Blank	Io and Vo fixed. (For harsh environment)	By request
Α	lo adjustable via built-in potentiometer	In Stock
AB	Io adjustable via built-in potentiometer +3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock

Note: 1.12V and 24V models without the AB type

2.India version needs MOQ for production, please consult MEANWELL for detail



#### **SPECIFICATION**

MODEL		XLG-100□-12-□	XLG-100	□-24-□			
	DC VOLTAGE	12V	24V				
	CONSTANT CURRENT REGION Note.2	8.4~ 12V	16.8~ 24V				
	RATED CURRENT (Default)	8A	4A				
	RATED POWER	96W	96W				
	RIPPLE & NOISE (max.) Note.3		240mVp-p				
	THI I LL WITGIGE (MUXI) NOIC.	Adjustable for A-Type only (via the buil					
	CURRENT ADJ RANGE	4 ~ 8A	2~4A				
	VOLTAGE TOLERANCE Note.4	±3.0%	±2.0%				
OUTPUT	LINE REGULATION	±0.5%	±0.5%				
		±2%					
	LOAD REGULATION						
	SETUP, RISE TIME Note.6	500ms, 100ms/230VAC, 1200ms, 100ms/115VAC					
	HOLD UP TIME (Typ.)	12ms/ 230VAC 12ms/ 115VAC					
	VOLTAGE RANGE Note.5	100 ~ 305VAC 142 ~ 431VDC					
		(Please refer to "STATIC CHARACTERISTIC" section)					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load					
	TOTAL HARMONIC DISTORTION	THD<10%(@load≧50%/115VAC,230VAC; @load≧75%/277VAC)					
INPUT	EFFICIENCY (Typ.)	92%					
	AC CURRENT	1.1A / 115VAC 0.5A / 230VAC 0.	42A/277VAC				
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300µs mea	sured at 50% Ipeak) at 230VAC; Per N	EMA 410			
	MAX. No. of PSUs on 16A	Qualita (almoulit hanaltan of turns D) / 144 .	unita (ainauit buankan af tuna C) at 2201	/A.C.			
	CIRCUIT BREAKER	Surfits (Circuit breaker of type B) / 14 t	inits (circuit breaker of type C) at 230	AC			
	LEAKAGE CURRENT	<0.75mA / 277VAC					
	NO LOAD						
	POWER CONSUMPTION	No load power consumption <0.5	W(for standard version)				
		95 ~ 108%					
	OVER CURRENT	Hiccup mode or Constant current limit	ing recovers automatically after fault	condition is removed			
	CHORT CIRCUIT	•					
PROTECTION	SHORT CIRCUIT	Hiccup mode or Constant current limiting, recovers automatically after fault condition is removed					
FROIECTION	OVER VOLTAGE	13.5 ~ 18V	27 ~ 34V				
		Shut down output voltage, re-power of					
	INPUT OVER VOLTAGE Note.7	320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is remo					
		Can survive input voltage stress of 440Vac for 48 hours					
	OVER TEMPERATURE	Shut down output voltage, re-power	on to recover				
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to " C	OUTPUT LOAD vs TEMPERATURE" s	ection)			
	MAX. CASE TEMP.	Tcase=+90°C					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.03%/℃ (0~60℃)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period	for 72min. each along X, Y, Z axes				
			•	BS FN/FN61347-2-13 independent BS FN/F	EN62384		
	SAFETY STANDARDS Note.7	UL8750(type"HL"), UL879, CSA C22.2 No. 250.13-12; ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384; GB19510.1, GB19510.14; EAC TP TC 004; J61347-1(H29), J61347-2-13(H29), KC61347-1, KC61347-2-13,					
		IS15885(Part2/Sec13)(for XLG-100I type only);NOM-058-SCFI-2017(except for Blank type); IP67 approved					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms	s/500VDC/25°C/70% RH				
		Parameter	Standard	Test Level/Note			
EMC SAFETY &		Conducted	BS EN/EN55015(CISPR15), GI	3/T 17743			
	EMC EMISSION	Radiated	BS EN/EN55015(CISPR15), GI				
	EMC EMISSION	Harmonic Current	BS EN/EN61000-3-2, GB1762				
		Voltage Flicker	BS EN/EN61000-3-2 , GB1702	5.1 Class C @load 250 %			
		BS EN/EN61547	DO E14/E1401000-3-3				
	EMC IMMUNITY		0444	T41			
		Parameter	Standard	Test Level/Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV	contact		
		Radiated	BS EN/EN61000-4-3	Level 3			
		EFT/Burst	BS EN/EN61000-4-4	Level 3			
		Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth(6	3K/10K option		
		Conducted	BS EN/EN61000-4-6	Level 3			
		Magnetic Field	BS EN/EN61000-4-8	Level 4			
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip	25 periods,		
		Voltage Dips and interruptions	B3 E17/E1101000-4-11	>95% interruptions 250 periods			
OTHERS	MTBF	2782.6K hrs min. Telcordia SR-332	(Bellcore); 276.4Khrs min. MIL-	HDBK-217F (25°ℂ)			
	DIMENSION	140*63*32mm (L*W*H)		· · · · · · · · · · · · · · · · · · ·			
	PACKING	0.58Kg;24pcs /15Kg /0.85CUFT					
NOTE	1. All parameters NOT specially	mentioned are measured at 230VAC in	put, rated current and 25℃ of ambien	temperature.			
NOTE	2. Please refer to "DRIVING ME			·			
	4. Tolerance : includes set up to	lerance, line regulation and load regulat	ion.				
	5. De-rating may be needed und	der low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.					
	7. Input voltage only for XLG-10	sured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.  10 I series, and I series without UL/CSA certificate.					
		as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.					
	complete installation, the fina (as available on https://www.r	neanwell.com//Upload/PDF/EMI_staten	nent_en.pdf)	or operating altitude higher than 2000m(6			

- 19. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft 10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
   11. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 80℃ or less.
   12. Products sourced from the Americas regions may not have the PSE/CCC/BIS/KC logo. Please contact your MEAN WELL sales for more information.
   13. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf
   14. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains.
   15. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.
   Product Liability Disclaimer: Err detailed information, please refer to https://www.meanwell.com/sequire/Disclaimer aspx.

- % Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx File Name:XLG-100-SPEC 2024-03-12



### **SPECIFICATION**

MODEL		XLG-100 🗌 -L- 🗌	XLG-100H	<u> </u>			
	RATED CURRENT (Default)	700mA	2100mA				
	RATED POWER	100W	100W				
	CONSTANT CURRENT REGION	71 ~ 142V	27 ~ 56V				
	FULL POWER CURRENT RANGE	700~1050mA	1750~2780mA				
OUTPUT	OPEN CIRCUIT VOLTAGE (max.)		60V				
	CURRENT ADJ. RANGE	350~1050mA	875~2780mA				
	CURRENT RIPPLE	3.0%(@rated current)					
	CURRENT TOLERANCE	±5%					
	SET UP TIME	500ms/230VAC, 1200ms/115VAC					
	VOLTAGE RANGE Note.5	100 ~ 305VAC 142VDC ~ 431VDC					
	FREQUENCY RANGE	(Please refer to "STATIC CHARACTERISTIC" ang " DRIVING METHODS OF LED MODULE"section)					
	PREQUENCT RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF≥0.97 / 115VAC, PF≥0.95 / 230VAC, PF≥0.92 / 277VAC at full load (Please refer to "Power Factor Characteristic" section)					
		(Please refer to Power Factor Characteristic Section)  THD< 10% (@ load ≥ 50% at 115VAC/230VAC ,@load ≥ 75% at 277VAC)					
	TOTAL HARMONIC DISTORTION	Please refer to "TOTAL HARMONIC DISTORTION (THD)" section					
INPUT	EFFICIENCY (Typ.)	92.5% 91%					
	AC CURRENT (Typ.)	1.1A / 115VAC 0.5A / 230VAC 0.	42A / 277VAC				
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=300µs measured at	t 50% Ipeak) at 230VAC; Per NEMA 410				
	MAX. NO. of PSUs on 16A	0 11/1 11 11 11 11 11 11					
	CIRCUIT BREAKER	8 unit(circuit breaker of type B) / 14 units(ci	rcuit breaker of type C) at 230VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC					
	STANDBY	Otan disconnection 40 FW 5	- AD T (Dii OFF)/ftd				
	POWER CONSUMPTION	Standby power consumption <0.5W fo	or AB-Type(Dimming OFF)(for stand	ard version)			
	OVED DOWED	105 ~ 150%					
	OVER POWER	Hiccup mode, recovers automatically after	fault condition is removed				
	SHORT CIRCUIT	Hiccup mode or Constant current limiting, re	ecovers automatically after fault condition	n is removed			
DDOTECTION	OVER VOLTAGE	160 ~ 220V	66 ~ 90V				
PROTECTION	OVER VOLIAGE	Shut down output voltage, re-power on to recover					
	INPUT OVER VOLTAGE Note.7	320 ~ 390VAC (Shut down output voltage when the input voltage exceeds protection voltage, recovers automatically after fault condition is removed					
	INPUT OVER VOLTAGE Note./	Can survive input voltage stress of 440Vac for 48 hours					
	OVER TEMPERATURE	Shut down output voltage, re-power on to					
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)					
	MAX. CASE TEMP.	Tcase=+90°C					
ENVIRONMENT	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
LITTINONIILITI	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 7	72min. each along X, Y, Z axes				
		UL8750(type"HL"), CSA C22.2 No. 250.13-					
	SAFETY STANDARDS Note.7	GB19510.1, GB19510.14; EAC TP TC 004; J61347-1(H29), J61347-2-13(H29), KC61347-1, KC61347-2-13,					
	WITHOUTH NO. TAGE	IS15885(Part2/Sec13)(for XLG-100I type only		pe); IP67 approved			
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/					
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 50					
		Parameter	Standard	Test Level/Note			
		Conducted	BS EN/EN55015(CISPR15) ,GB/T177				
	EMC EMISSION	Radiated	BS EN/EN55015(CISPR15) ,GB/T177				
		Harmonic Current	BS EN/EN61000-3-2 ,GB/T17625.1	Class C @load≥50%			
		Voltage Flicker	BS EN/EN61000-3-3				
	EMC IMMUNITY	BS EN/EN61547					
		Parameter	Standard	Test Level/Note			
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact			
		Radiated	BS EN/EN61000-4-3	Level 3			
		EFT/Burst	BS EN/EN61000-4-4	Level 3			
		Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth(6K/10K opt			
		Conducted	BS EN/EN61000-4-6	Level 3			
		Magnetic Field	BS EN/EN61000-4-8	Level 4			
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	>95% dip 0.5 periods, 30% dip 25 periods >95% interruptions 250 periods			
	MTDE	2702 CV has mis	(anna)				
OTHERS	MTBF	2782.6K hrs min. Telcordia SR-332 (Bellcore); 276.4Khrs min. MIL-HDBK-217F (25°C)					
JINEKS	DIMENSION	140*63*32mm (L*W*H)					
	PACKING	0.58Kg;24pcs /15Kg /0.85CUFT					
		mentioned are measured at 230VAC input, ra	ated current and 25 $^\circ\mathbb{C}$ of ambient tempera	ature.			

- complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

  9. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

  10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com

  11. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 80°C or less.

  12. Products sourced from the Americas regions may not have the PSE/CCC/BIS/KC logo. Please contact your MEAN WELL sales for more information.

  13. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED\_EN.pdf

  14. To fulfill requirements of the latest ErP regulation for lighting fixture, this LED driver can only be used behind a switch without permanently connected to the mains.

  15. If you need the NOM (Mexico) certificate, Please contact MEAN WELL sales representative for details.


  File Name:XLG-100-SPEC 2023-09-08

- \*\* Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx



#### ■ BLOCK DIAGRAM


PFC fosc: 50~120KHz PWM fosc: 60~130KHz

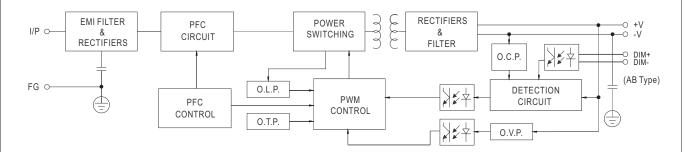

#### ■ DRIVING METHODS OF LED MODULE


#### **%** I-V Operating Area

#### 

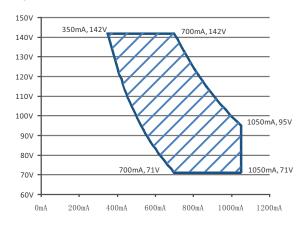

Recommend Performance Region


#### 

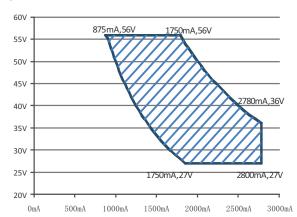

Recommend Performance Region

## 


This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

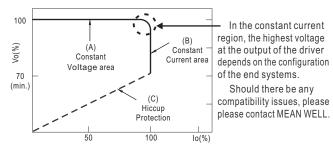

Typical output current normalized by rated current (%)




### **■ DIMMING OPERATION**

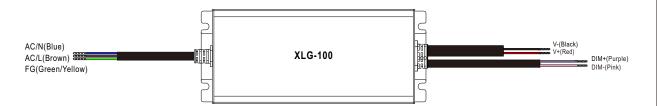


#### ※ 3 in 1 dimming function (for AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
   0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100  $\mu$  A (typ.)

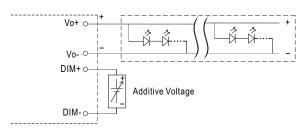


"DO NOT connect "DIM- to Vo-"

Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

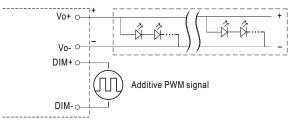



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

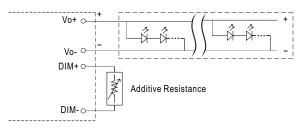

"DO NOT connect "DIM- to Vo-"









Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% I out <8%.

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



### ■ OUTPUT LOAD vs TEMPERATURE

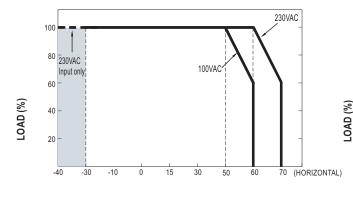

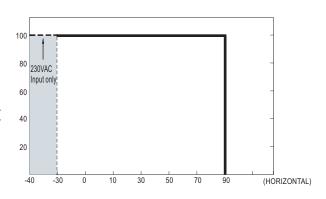

AMBIENT TEMPERATURE, Ta (°C)

Tcase (°C)

If XLG-100 operates in Constant Current mode with the rated current the maximum workable Ta is  $60\,^{\circ}\mathrm{C}$  (Typ. 230VAC) or  $50\,^{\circ}\mathrm{C}$  (Typ. 100VAC) Below 110VAC@ -30°C may retry to 2nd setup


### ■ STATIC CHARACTERISTIC


### ■ POWER FACTOR (PF) CHARACTERISTIC

※ Tcase at 75°

C



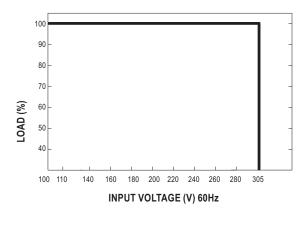

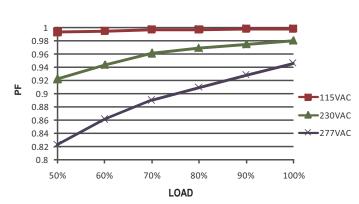



# ■ TOTAL HARMONIC DISTORTION (THD)

#### **■** EFFICIENCY vs LOAD

※ XLG-100-L Model, Tcase at 75℃


XLG-100 series possess superior working efficiency that up to 92.5% can be reached in field applications. ※ XLG-100-L Model. Tcase at 75°C

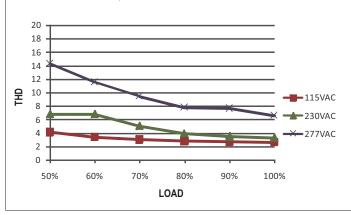

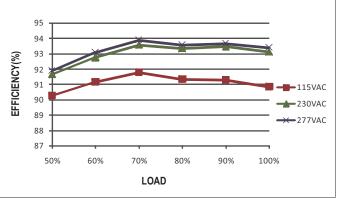




# ■ LIFE TIME

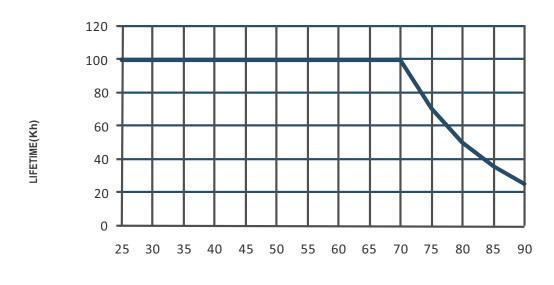


Tcase ( $^{\circ}\!\mathbb{C}$  )



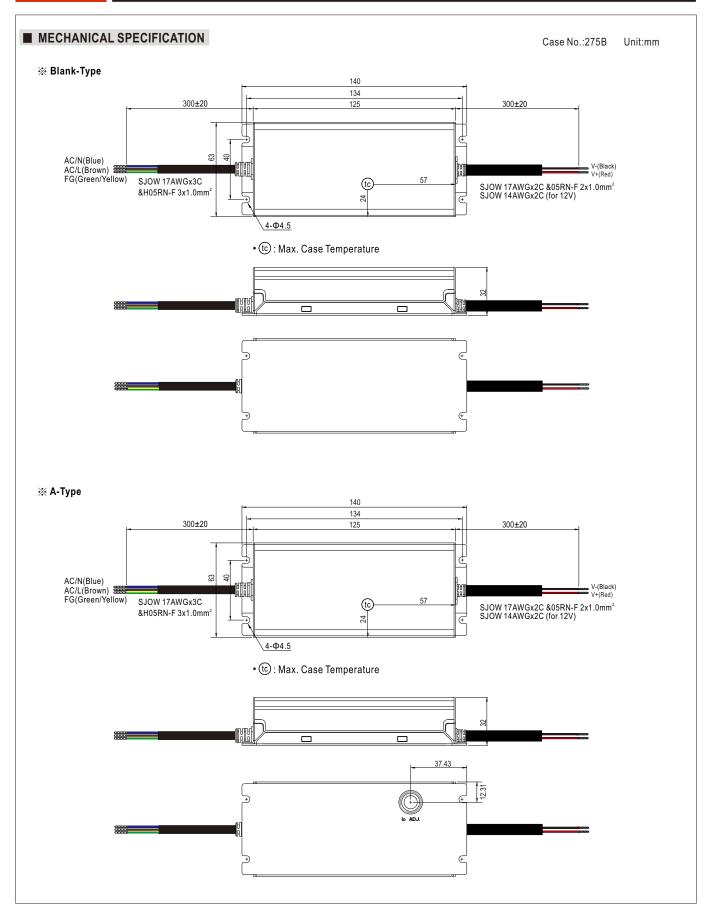





### ※ AB-Type

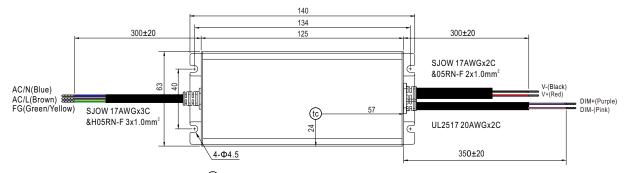

• tc : Max. Case Temperature

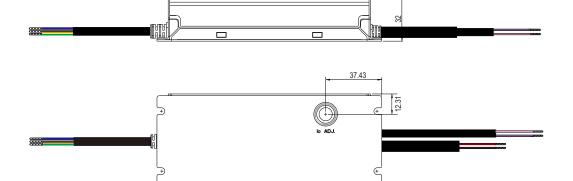

## ■ Recommend Mounting Direction



### **■ INSTALLATION MANUAL**

Please refer to : http://www.meanwell.com/manual.html